



## UNG33-12 (12V33Ah/20hr)



UNG Series is GEL battery which is manufactured with AGM separator and colloidal Silicon. Gel battery are featured with low self-discharge, strong ability to recover from deep discharging, excellent cycle life and performance at cold ambient temperatures than conventional VRLA

### Battery Construction


Component	Positive plate	Negative plate	Container	Cover	Safety valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	ABS	ABS	Rubber	Copper	Fiberglass	Colloidal silicon

### General Feature

- Micro millimeter SiO<sub>2</sub> and H<sub>2</sub>SO<sub>4</sub> technology for Efficient gas recombination of up to 99% and Freedom from electrolyte maintenance or water adding.
- Not restricted for air transport-complies with IATA/ICAO Special Provision A67.
- UL-recognized component.
- Can be mounted in any orientation.
- Computer designed lead, calcium tin alloy grid for high power density.
- Long service life, float or cyclic applications.
- Maintenance-free operation.
- Low self discharge.

### SPECIFICATION

Nominal voltage ..... 12V  
 Number of cell ..... 6  
 Length(mm/inch) ..... 195/7.68  
 Width(mm/inch) ..... 130/5.12  
 Height(mm/inch) ..... 155/6.10  
 Total Height(mm/inch) ..... 168/6.1  
 Approx. Weight (kg/lbs) ..... 10.5/23.1

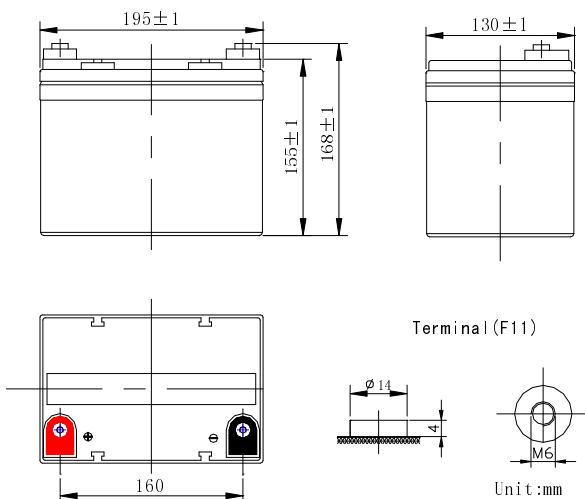

### Performance Characteristics

Capacity 77°F(25°C)	100 hour rate (0.39A、 11.1V)	39Ah
	20 hour rate (1.65A、 10.8V)	33Ah
	10 hour rate (3.1A、 10.5V)	31Ah
	1 hour rate (18.5A、 9.6V)	18.5Ah
Internal Resistance	Full charged Battery77°F(25°C):10mΩ	
Operating Temperature Range	Discharge: -20~60°C	
	Charge: -10~60°C	
	Storage: -20~60°C	
Self-Discharge 3% of capacity declined per month at 20°C(average)		
Max. discharge current77°F(25°C): 330A(5S)		
Charge (Constant Voltage)	Float: 13.38~13.68 V/77° F(25°C)	
	Cycle:14.28~14.52 V/77°F(25°C) Max. Current: 8.25A	









Discharge Constant Current (Amperes at 77° F 25 °C)

End Point Volts/Cell	10min	15min	30min	1h	3h	5h	10h	20h	100h
1.60V	75.2	58.4	33.5	19.0	8.47	5.82	3.23	1.69	0.42
1.65V	71.4	55.5	31.8	18.5	8.35	5.76	3.20	1.68	0.41
1.70V	67.1	52.1	29.8	18.0	8.20	5.68	3.15	1.67	0.41
1.75V	62.5	48.5	28.3	17.4	8.05	5.60	3.10	1.66	0.40
1.80V	57.5	44.6	26.0	16.7	7.86	5.48	3.00	1.65	0.40

Discharge Constant Power (watts at 77° F 25 °C)

End Point Volts/Cell	10min	15min	30min	45min	1h	2h	3h	5h	10h
1.60V	142	106	68.2	50.9	41.9	23.2	16.9	11.2	6.18
1.65V	134	102	66.1	49.8	41.2	22.8	16.8	11.1	6.15
1.70V	126	97.8	64.1	48.8	40.6	22.3	16.6	11.0	6.10
1.75V	118	94.2	62.0	47.8	39.8	21.9	16.3	10.9	6.05
1.80V	110	90.2	59.8	46.8	39.1	21.5	15.9	10.7	5.94

(Note)The above characteristics data are average values obtained Within three charge/discharge cycles not the minimum values.

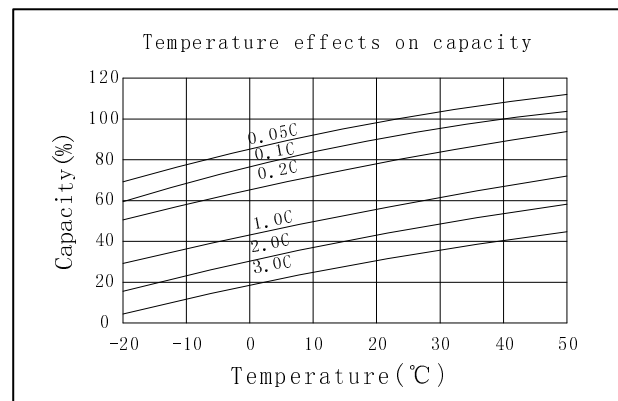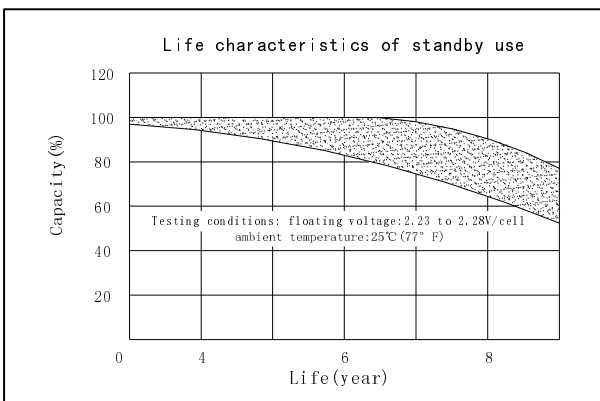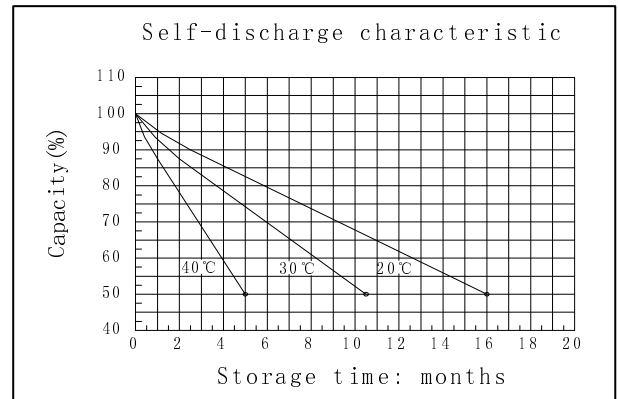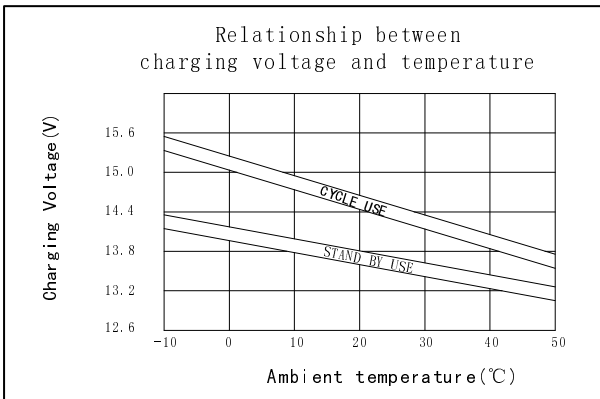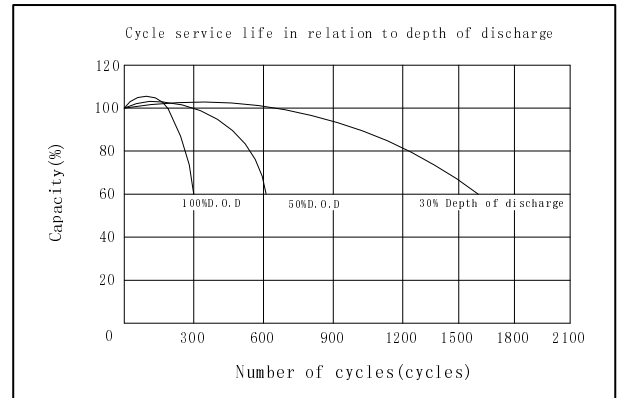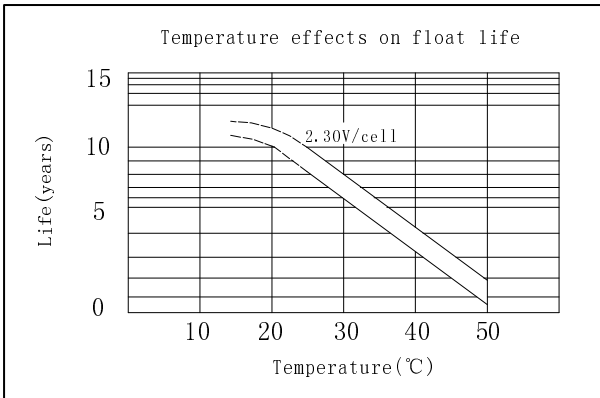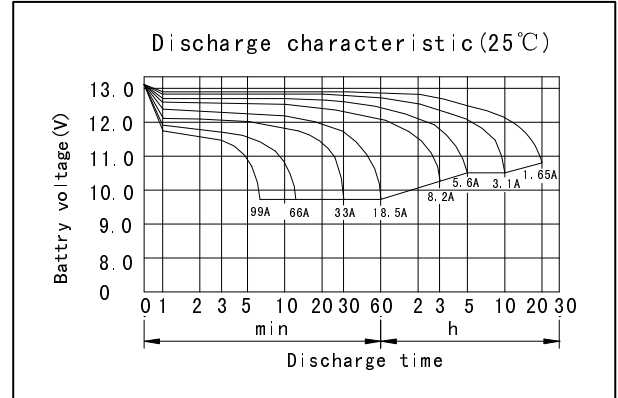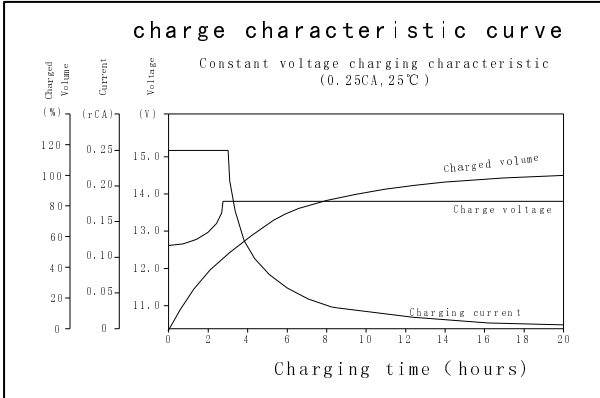

**DONGGUAN OREMA POWER CO., LTD**

Add: #1 Qilinling Road Shahu, Tangxia Town, Dongguan Guangdong China

TEL: +86-769- 3896 1163 +86-769- 3896 1168

FAX: +86-769- 3896 1169



[www.oremabattery.com](http://www.oremabattery.com)